

300lbs
Load Capacity

ALUMINIUM

EN131

Conformance to
Applicable Standards

MODEL	EXTENSION LADDER HEIGHT		STEPLADDER HEIGHT		CLOSED HEIGHT		APPROX SPREAD	WEIGHT	LOAD CAPACITY
	FEET	METER	FEET	METER	FEET	METER			
G5512	12.0	3.6	7.0	2.2	7.5	2.3	61"	17.9 lbs	300 lbs
G5515	15.0	4.5	8.6	2.6	9.3	2.8	76"	23.4 lbs	300 lbs
G5520	19.4	5.9	10.5	3.2	11.1	3.4	92"	31.0 lbs	300 lbs


G3500 Series / EXTENSION LADDER



Heavy Duty extruded rung locks are spring loaded to operate smoothly



Robust, self-aligning, free-swinging shoe with slip-resistant rubber pads

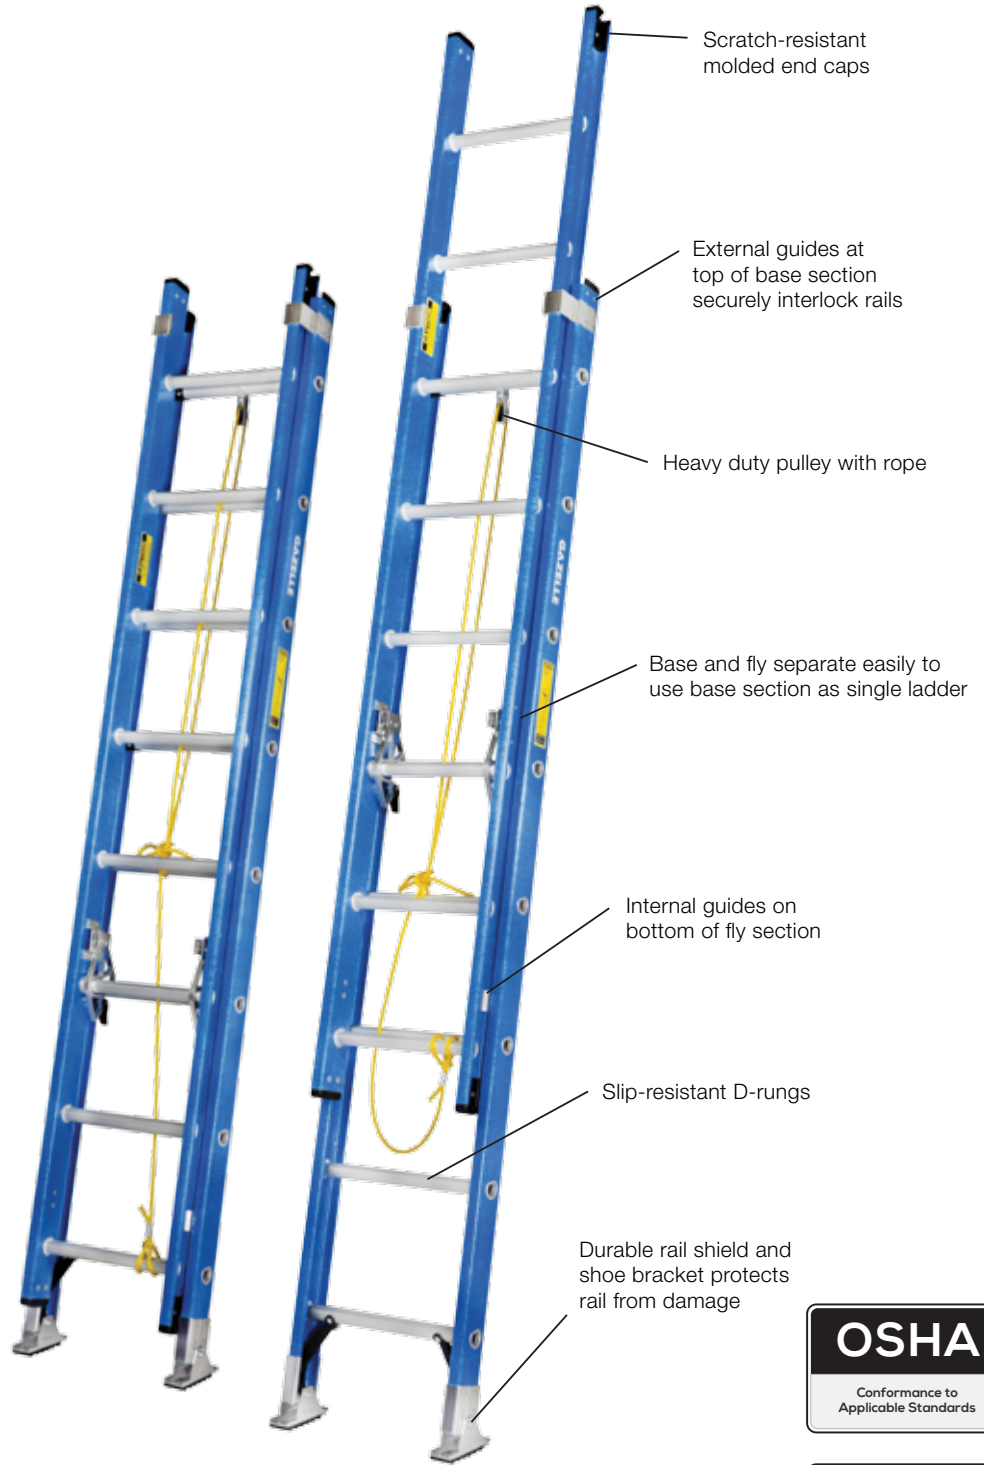

Scratch-resistant molded end caps

External guides at top of base section securely interlock rails

Heavy duty pulley with rope

Base and fly separate easily to use base section as single ladder

Internal guides on bottom of fly section

Slip-resistant D-rungs

Durable rail shield and shoe bracket protects rail from damage

Model G3516



300lbs
Load Capacity

FIBERGLASS

MODEL	LADDER HEIGHT		WORKING HEIGHT		MAX. WORKING LENGTH		CLOSED LENGTH	SECTIONS	WEIGHT	LOAD CAPACITY
	FEET	METER	FEET	METER	FEET	METER	FEET			
G3516	16.0	4.8	15.0	4.6	13.0	4.0	8.0	Double Sections	31.0 lbs	300 lbs
G3524	24.0	7.3	23.0	7.0	21.0	6.4	12.0	Double Sections	40.0 lbs	300 lbs
G3528	28.0	8.5	27.0	8.2	25.0	7.6	14.0	Double Sections	46.0 lbs	300 lbs