



## ELECTRICAL TOOLS

## Sleeve Terminal Crimper

Crimping capacity: outer diameter  
0.25-6 mm<sup>2</sup>



SKU	SKU Description
G80401	0.25-6 mm <sup>2</sup> Sleeve Terminal Crimper

## Non-Preinsulated Terminal Crimper

Crimping capacity: outer diameter  
0.5-1 / 1-2.5 / 4-6 mm<sup>2</sup>



SKU	SKU Description
G80402	0.5-1 / 1-2.5 / 4-6 mm <sup>2</sup> Non-Preinsulated Terminal Crimper

Pre-Insulated Terminal Crimper

Crimping capacity: outer diameter  
1-6 mm<sup>2</sup>



SKU	SKU Description
G80403	1-6 mm <sup>2</sup> Pre-Insulated Terminal Crimper

## Manual Hydraulic Crimping Tool

G9600 Series - G9621



- Crimping head rotates 360°
- Two stage hydraulic, automatic pressure release
- Super quick, light, durable
- Flip top style for easy access to the fitting

### Standard Accessories

- Hydraulic Crimping Tool
- Crimping Dies 6-300mm<sup>2</sup> (6,10, 16, 25, 35, 50, 70, 95, 120, 150, 185, 240, 300)
- Carry Case
- User Manual

Specifications	Range
Crimping Force	6t
Stroke	17mm
Rated Pressure	700bar
Crimping Capacity	Max 300mm <sup>2</sup>
Net Weight	3.8kg
Standard Dies	Cu50-300mm <sup>2</sup>
Dimensions	50x17x7 cm
PP Plastic Case	67x30x12 cm

## Manual Hydraulic Crimping Tool

G9600 Series - G9622



- Crimping head rotates 360°
- Two stage hydraulic, automatic pressure release
- C-head with 42mm opening width for easy access to the fitting
- Suitable for crimping cable terminal, C-clamp, connector and overhead line

### Standard Accessories

- Hydraulic Crimping Tool
- Crimping Dies 6-400mm<sup>2</sup> (6, 10, 16, 25, 35, 50, 70, 95, 120, 150, 185, 240, 300, 400)
- Carry Case
- User Manual

Specifications	Range
Crimping Force	12t
Stroke	42mm
Rated Pressure	700bar
Crimping Capacity	Max 400mm <sup>2</sup>
Net Weight	6.1kg
Standard Dies	Cu70-400mm <sup>2</sup>
Dimensions	56x17x7 cm
PP Plastic Case	67x30x12 cm

## Battery Powered Hydraulic Crimping Tool

G9600 Series - G9631



### Standard Accessories

- Hydraulic Crimping Tool
- Crimping Dies 6-150mm<sup>2</sup> (6,10, 16, 25, 35, 50, 70, 95, 120, 150)
- Battery x 2 pcs (2.0Ah x 1 pc and 4.0Ah x 1 pc)
- Charger x 1 pc (UK Plug)
- Carry Case
- User Manual

Specifications	Range
Crimping Force	3.5t
Stroke	10mm
Oil Reservoir	50ml
Crimping Capacity	Max Cu150mm <sup>2</sup>
Cutting Range	/
Net Weight	2.2kg
Packing Case	Plastic Case
Standard Dies	Cu10-150mm <sup>2</sup>
Package Size	59x51x14 cm

## Battery Powered Hydraulic Crimping Tool

G9600 Series - G9632



### Standard Accessories

- Hydraulic Crimping Tool
- Crimping Dies 6-300mm<sup>2</sup> (6, 10, 16, 25, 35, 50, 70, 95, 120, 150, 185, 240, 300)
- Battery x 2 pcs (2.0Ah x 1 pc and 4.0Ah x 1 pc)
- Charger x 1 pc (UK Plug)
- Carry Case
- User Manual

Specifications	Range
Crimping Force	6t
Stroke	17mm
Oil Reservoir	50ml
Crimping Capacity	Max Cu300mm <sup>2</sup> / Al240mm <sup>2</sup>
Cutting Range	/
Net Weight	2.91kg
Packing Case	Plastic Case
Standard Dies	Cu16-300mm <sup>2</sup>
Package Size	59x51x14 cm

## Battery Powered Hydraulic Crimping Tool

G9600 Series - G9633



- Flip top style, crimping head rotates 360°
- Two stage hydraulic, automatic pressure release
- LCD screen, display crimping times
- Equipped with LED work lights to make work easier
- High-capacity 18V power-on display lithium battery with fast charger
- PP plastic, molding in one, strong and anti-impact

### Standard Accessories

- Hydraulic Crimping Tool
- Crimping Dies 6-300mm<sup>2</sup> (6,10, 16, 25, 35, 50, 70, 95, 120, 150, 185, 240, 300)
- Battery x 2 pcs (18V, 4.0Ah)
- Charger x 1 pc (UK Plug)
- Carry Case
- User Manual

Specifications	Range
Crimping Force	6t
Stroke	17mm
Rated Pressure	700bar
Crimping Capacity	Max 300mm <sup>2</sup>
Net Weight	4.2kg
Standard Dies	Cu50-300mm <sup>2</sup>
Dimensions	28x7x29 cm
Packing Size	59x51x14 cm



## 3-in-1 Battery Powered Hydraulic Crimping Tool

G9600 Series - G9633UNV



- Flip top style, crimping head rotates 360°
- Two stage hydraulic, automatic pressure release
- Built-in intelligent computer chip, OLED display is easy to read information
- Equipped with LED work lights to make work easier
- High-capacity 18V power-on display lithium battery with fast charger
- PP plastic, molding in one, strong and anti-impact

### Standard Accessories

- Hydraulic Crimping Tool
- Crimping Dies 6-300mm<sup>2</sup> (6, 10, 16, 25, 35, 50, 70, 95, 120, 150, 185, 240, 300)
- Battery x 2 pcs (18V, 4.0Ah)
- Charger x 1 pc (UK Plug)
- Carry Case
- User Manual

Specifications	Range
Crimping Force	6t
Rated Pressure	700bar
Crimping Capacity	Max 300mm <sup>2</sup>
Punching Capacity	Plain Steel: 3.5mm thick, Ø64mm Stainless Steel: 2.5mm thick, Ø64mm
Cutting Capacity	Max 40mm Cu/Al/ACSR
Nut Splitting Capacity	-
Net Weight	4.5kg
Standard Dies	Die Adapter: Cu50-300mm <sup>2</sup> Cutting Blade: UCACSR/UC40
Dimension	43x8x28cm
Packing	Plastic Case
Packing Size	59x51x14cm

## Battery Powered Hydraulic Crimping Tool

G9600 Series - G9634



- Flip top style, crimping head rotates 360°
- Two stage hydraulic, automatic pressure release
- LCD screen, display crimping times
- Equipped with LED work lights to make work easier
- High-capacity 18V power-on display lithium battery with fast charger
- PP plastic, molding in one, strong and anti-impact

### Standard Accessories

- Hydraulic Crimping Tool
- Crimping Dies 6-400mm<sup>2</sup> (6,10, 16, 25, 35, 50, 70, 95, 120, 150, 185, 240, 300, 400)
- Battery x 2 pcs (18V, 4.0Ah)
- Charger x 1 pc (UK Plug)
- Carry Case
- User Manual

Specifications	Range
Crimping Force	12t
Stroke	42mm
Rated Pressure	700bar
Crimping Capacity	Max 400mm <sup>2</sup>
Net Weight	6.8kg
Standard Dies	Cu50-400mm <sup>2</sup>
Dimensions	44x7x28 cm
Packing Size	59x51x14 cm

## Battery Powered Hydraulic Crimping Tool

G9600 Series - G9634-6



- Flip top style, crimping head rotates 360°
- Two stage hydraulic, automatic pressure release
- LCD screen, display crimping times
- Equipped with LED work lights to make work easier
- High-capacity 18V power-on display lithium battery with fast charger
- PP plastic, molding in one, strong and anti-impact

### Standard Accessories

- Hydraulic Crimping Tool
- Crimping Dies 16-630mm<sup>2</sup> (16, 25, 35, 50, 70, 95, 120, 150, 185, 240, 300, 400, 500, 630)
- Battery x 2 pcs (18V, 4.0Ah)
- Charger x 1 pc (UK Plug)
- Carry Case
- User Manual

Specifications	Range
Crimping Force	15t
Stroke	50mm
Rated Pressure	700bar
Crimping Capacity	Max 630mm <sup>2</sup>
Net Weight	9.5kg
Standard Dies	Cu50-630mm <sup>2</sup>
Dimensions	51x8x28 cm
Packing Size	66x49x14cm

## Hydraulic Hand Pump

G9600 Series - G9645-II



- Double action speed pump
- Built in High-pressure and Low-pressure free switching valve
- Made of aluminum-titanium alloy
- Corrosion resistance,
- Impact resistance
- Suitable for various harsh environments
- Compatible with multiple tools
- Maximum Pressure: 700bar

### Standard Accessories

- Hydraulic Hand Pump
- 2m Hose

### Note:

Compatible for G9636 crimping head or G9646 cutting head and multiple tools

Specifications	Range
Rated Pressure	700bar
Pump Weight	5.0 kg
Transportation Box Weight	1.2 kg
Pump Dimensions (Hose not Included)	61 × 13 × 17cm
Transportation Box Dimensions	74 × 20 × 21cm

## Battery Powered Hydraulic Pump

G9600 Series - G9635



- Automatic reset
- Fast oil return
- Real-time display
- Wired control & wireless remote control
- Compatible with multiple tools

### Standard Accessories

- 2 Batteries (18V / 4.0Ah)
- 1 Charger (UK Plug)
- 2m Hose
- Wired Remote Control
- Wireless Remote Control
- Canvas Carrying Bag

Specifications	Range
Rated Pressure	700bar
Oil Output at High Pressure (20-700bar)	0.2L / min, 2 Batteries
	0.1L / min, 1 Battery
Oil Output at Low Pressure (0-20bar)	1.3L / min, 2 Batteries
	0.65L / min, 1 Battery
Tank Capacity	0.7L
Working Noisy	83dB(A)
Battery Type	Lithium Battery
Battery Voltage	18.0V DC
Output Current	4.0A
Charging Time	40min
Weight	7.5kg

## Hydraulic Foot Pump

G9600 Series - G9645



Maximum Pressure:

- 700bar

### Note:

Compatible for G9636 crimping head or G9646 cutting head

Specifications	Range
Rated Pressure	700bar
Pump Weight	8.8kg
Transportation Box Weight	4.5kg
Pump Dimensions (Hose not Included)	560 × 180 × 205mm
Transportation Box Dimensions	720 × 200 × 300mm

## Hydraulic Crimping Head

G9600 Series - G9636



- U-type crimping head, sturdy and durable
- Pin-type crimping head for easy access to the fitting
- Quick couple for easy disassembly
- Powered by single acting hydraulic pump
- Light weight, suitable for overhead line work

### Standard Accessories

- Crimping Dies 16-630mm<sup>2</sup>
- Canvas Carrying Bag

Specifications	Range
Crimping Force	25t
Stroke	20mm
Rated Pressure	700bar
Crimping Capacity	630mm <sup>2</sup>
Weight	5.5kg
Packing	Canvas Bag

## Hydraulic Cutting Head

G9600 Series - G9646



Cutting capacity of:


- Max of 12T force
- 105mm dia. of Cu / Al / Light armoured cable

### Note:

Compatible for G9645 foot pump or G9635 battery operated pump

Specifications	Range
Output Force	12t
Cutting Capacity	≤φ105mm
Rated Pressure	700bar
Weight	7.5kg
Length	550mm
Packing	Plastic Case

Ratchet Cable Cutter

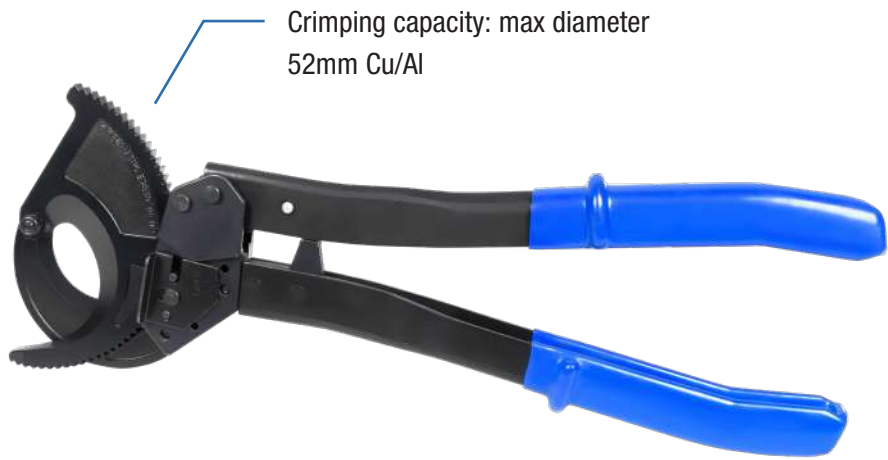

SKU	SKU Description
G80404	52 mm Ratchet Cable Cutter

## Manual Hydraulic Cutting Tool

G9600 Series - G9641



Specifications	Range
Output Force	6t
Rated Pressure	700bar
Cutting Capacity	Max: $\varnothing 50\text{mm}$ Cu/Al 10kV 400mm <sup>2</sup>
Net Weight	3.9kg
Dimensions	56x17x8 cm
Packing Size	51x22x11 cm

## Manual Hydraulic Cutting Tool

G9600 Series - G9642



Specifications	Range
Output Force	12t
Rated Pressure	700bar
Cutting Capacity	Max: $\varnothing 55\text{mm}$ Cu/Al/ACSR Max: $\varnothing 22\text{mm}$ Steel Bar
Net Weight	7kg
Dimensions	61x17x8.5 cm
Packing Size	51x22x11 cm



## Battery Powered Hydraulic Cutting Tool



### Standard Accessories

- Battery x 2 pcs (18V, 4.0Ah)
- Charger x 1 pc (UK Plug)

Specifications	G9656	G9655	G9651
Output Force	6t	6t	12t
Rated Pressure	700bar	700bar	700bar
Cutting Capacity	Max: Ø50mm Cu/Al	Max: Ø85mm Cu/Al	Max: Ø105mm Cu/Al
Net Weight	4.2kg	6.7kg	10.7kg
Dimensions	440x70x280 mm	550x70x280 mm	640x90x280 mm
Packing	Plastic Case	Plastic Case	Plastic Case
Packing Size	59x51x14 cm	59x51x14 cm	66x48x12.5 cm

## Battery Powered Hydraulic Cutting Tool

G9600 Series - G9651S



### Standard Accessories

- Battery x 2 pcs (18V, 4.0Ah)
- Charger x 1 pc (UK Plug)

Specifications	Range
Output Force	12t
Rated Pressure	700bar
Cutting Capacity	Max: Ø105mm Cu/Al
	Max (10kV) 3x400mm <sup>2</sup> Light Armored Cable
Net Weight	10.7kg
Dimensions	640x90x280 mm
Packing	Plastic Case
Packing Size	66x48x12.5 cm

## Hydraulic Cutting Head

G9600 Series - G9646



Cutting capacity of:

- Max of 12T force
- 105mm dia. of Cu / Al / Light armoured cable

**Note:**

Compatible for G9645 foot pump or G9635 battery operated pump

Specifications	Range
Output Force	12t
Cutting Capacity	≤φ105mm
Rated Pressure	700bar
Weight	7.5kg
Length	550mm
Packing	Plastic Case

## Hydraulic Cutting Head



G9647



G9648



G9649



G9649-II



G9650

Specifications	G9647	G9648	G9649	G9649-II	G9650
Output Force	10t	10t	18t	30t	10t
Cutting Capacity	120mm	130mm	185mm	160mm	170mm
Rated Pressure	700bar	700bar	700bar	700bar	700bar
Weight	12kg	20kg	24kg	24kg	25kg
Dimension	66 x 24 x 10cm	66 x 24 x 10cm	78 x 26 x 10cm	97 x 34 x 15cm	66 x 24 x 10cm
Pump Requirements	Single Action	Single Action	Single Action	Dual Action	Single Action
Packing	Plastic Case	Plastic Case	Wooden Case	Wooden Case	Plastic Case

Sheet Steel Puncher



Specification	Range
Model	G9685
Standard Dies	6 Set - 1/2" 3/4" 1" 1 1/4" 1 1/2" 2"
Output Force	9t
Rated Pressure	700bar
Punching Capacity	Plain Sheet Steel 3.2mm
	Stainless Sheet Steel 1.6mm

## Busbar Cut and Punch Series

G9680 Series - G9686 & G9688



**G9686**



**G9688**

### G9686

- Busbar punching tool
- Standard sets of dies  $\phi 8$ , 10.5, 13.5, 17.5, 20.5mm

#### Standard Accessories

- Punching Head
- Punching Dies  $\phi 8$ , 10.5, 13.5, 17.5, 20.5mm

#### Note:

Compatible with G9645 foot pump, G9745-II hand pump, G9635 battery operated pump

### G9688

- Busbar punching tool
- Standard sets of dies  $\phi 16$ , 18, 22, 24mm

#### Standard Accessories

- Punching Head
- Punching Dies  $\phi 16$ , 18, 22, 24mm

#### Note:

Compatible with double action pump G9638 (petrol powered) and G9637 (electric powered)

Specifications	G9686	G9688
Punching Force	31t	60t
Max Thickness	Cu/Al 13mm, Plain Steel 10mm	Cu/Al 13mm, Plain Steel 10mm
Rated Pressure	700bar	700bar
Punching Dies Included	$\phi 8$ , 10.5, 13.5, 17.5, 20.5mm	$\phi 16$ , 18, 22, 24mm
Weight	13.5kg	34kg
Dimension	25x10x37cm	-
Packing	Steel Case	Steel Case

## Busbar Cut and Punch Series

G9680 Series - G9681, G9683 & G9684



- Copper and Aluminum Busbar cutting tool
- Quick cut with smooth cut surface, chipping, cut waste easy to recycle
- V-type blade ensure cut surface not depressed, efficient contact area of busbar
- Scale engraved helps the center adjustment easier
- Quick coupler for easy disassembly
- Powered by single acting hydraulic pump

### Standard Accessories

- Cutting Head


### Note:

Compatible with G9645 foot pump, G9745-II hand pump, G9635 battery operated pump

Specifications	G9681	G9683	G9684
Cutting Force	25t	30t	40t
Max Thickness	12mm	12mm	16mm
Rated Pressure	700bar	700bar	700bar
Max Cutting Width	150mm	200mm	200mm
Weight	28kg	35kg	46.5kg
Unit Dimension	27 x 19 x 42cm	31 x 20 x 42cm	33 x 20 x 45cm
Packing	Steel Case	Steel Case	Steel case
Packing Dimension	38 x 27 x 46cm	38 x 27 x 46cm	50 x 32 x 46cm

## Hydraulic Bearing Puller Series

G9670 Series - G9671 & G9672

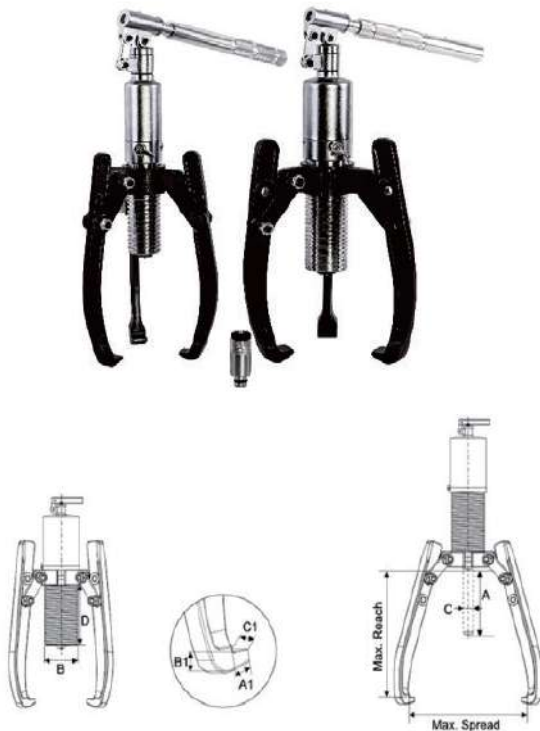

- Three jaws bearing puller
- High strength alloy steel forged
- Four sections foldable and removable handle, easy to operate
- 360 ° swivel seat
- Puller body is equipped with a safety valve
- Hydraulic cylinder hard chrome treatment to strengthen hardness
- Claw load is more than 120% of the rated load

### Standard Accessories

- Hydraulic Bearing Puller

### Note:

With built-in hydraulic pump

Specifications	G9671	G9672
Force	12t	30t
Stroke (A)	85mm	111mm
Pressure Area	14.45cm <sup>2</sup>	42cm <sup>2</sup>
Claw Depth	260mm	435mm
Claw Distance	375mm	550mm
Weight	9.5kg	36kg
Top	B = 60mm	B = 98mm
	C = 28mm	C = 50mm
	D = 118mm	D = 115mm
Claw End	A1 = 14mm	A1 = 20mm
	B1 = 10mm	B1 = 27mm
	C1 = 29mm	C1 = 38mm

## Hydraulic Bearing Puller Series

G9670 Series - G9673 & G9674



- Three jaws bearing puller
- High strength alloy steel forged
- Four sections foldable and removable handle, easy to operate
- 360 ° swivel seat
- Puller body is equipped with a safety valve
- Hydraulic cylinder hard chrome treatment to strengthen hardness
- Claw load is more than 120% of the rated load

### Standard Accessories

- Hydraulic Bearing Puller

### Note:

Compatible with G9645 foot pump, G9745-II hand pump, G9635 battery operated pump

Specifications	G9673	G9674
Force	12t	30t
Stroke (A)	85mm	111mm
Pressure Area	14.45cm <sup>2</sup>	42cm <sup>2</sup>
Claw Depth	260mm	435mm
Claw Distance	375mm	550mm
Weight	9.5kg	34kg
Top	B = 60mm	B = 98mm
	C = 28mm	C = 50mm
	D = 118mm	D = 115mm
Claw End	A1 = 14mm	A1 = 20mm
	B1 = 10mm	B1 = 27mm
	C1 = 29mm	C1 = 38mm



18V Charger



SKU	SKU Description
G9691	18V Charger

18V Battery



G9692



G9694

SKU	SKU Description
G9692	18V, 2.0Ah Battery
G9694	18V, 4.0Ah Battery

INNOVATION  
PERFORMANCE  
SAFETY  
CONFIDENCE  
GAZELLE

**GAZELLE**

[sales@gazelleindustrial.com](mailto:sales@gazelleindustrial.com) | [www.gazelleindustrial.com](http://www.gazelleindustrial.com)